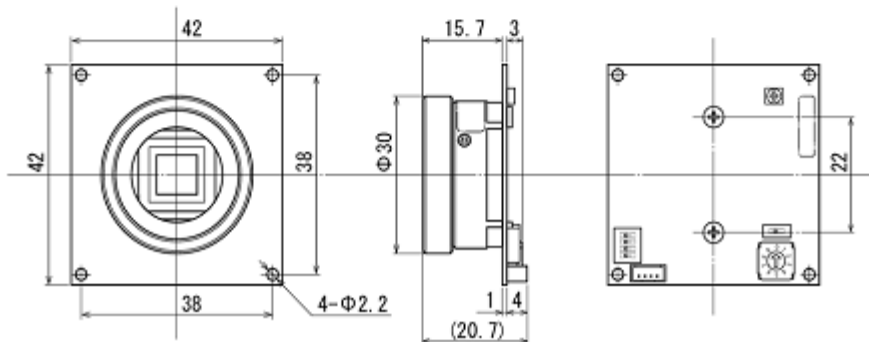


SPECIFICATIONS

Model	W-01CDB3 (NTSC)	W-01CDB3 (PAL)
Pick-up element	1/3 inch interline transfer CCD image sensor	
Number of total pixels	811(H) × 508(V)	795(H) × 596(V)
Number of effective pixels	768(H) × 494(V)	752(H) × 582(V)
Unit cell size	6.4µm(H) × 7.5µm(V)	6.5µm(H) × 6.3µm(V)
Synchronizing system	Internal	
Scanning system	2:1 interlace	
Video output	Composite Video, 1Vp-p, 75ohms, unbalanced	
Resolution (Horizontal)	450TVL (Center)	
Minimum illumination	1.5lx F1.2	
S/N	More than 50dB (AGC=3dB, $\gamma=1.0$)	
AE mode	Fixed	1/50, 1/120 sec.
	EI	1/250, 1/500, 1/1000, 1/2000, 1/5000, 1/10000, 1/20000, 1/50000 sec.
		1/80 - 1/100000 sec.
White balance	ATW, Preset (3200K, 5100K, 8200K)	
AGC	3 - 24dB	
Gamma characteristics	$\gamma \approx 0.45$	
Video level	100IRE / 75IRE	
Lens iris	Video / DC (EIAJ arrangement)	
Mirror image function	ON / OFF	
Power supply	DC+12V±10%	
Power consumption	1.2W (100mA)	
Operating temperature	-10°C - +40°C	
Storage temperature	-30°C - +70°C	
Operating / Storage humidity	Less than 95% RH (Without condensation)	
Lens mount	CS mount	
Weight	Approx. 35g	

※Design and specifications are subject to change without notice.

DIMENSIONS (mm)

SDT - Dr. Seitner GmbH

MUEHLBACHSTR. 20 PHONE: +49 8152 37200
D-82229 SEEFELD FAX: +49 8152 79880

E-MAIL: org@sdt-seitner.com
HOMEPAGE: www.sdt-seitner.com